


Lindseth RRA 68

OCTOGONAL FEEDING TANK

for fish farming

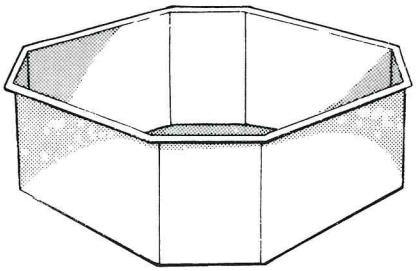

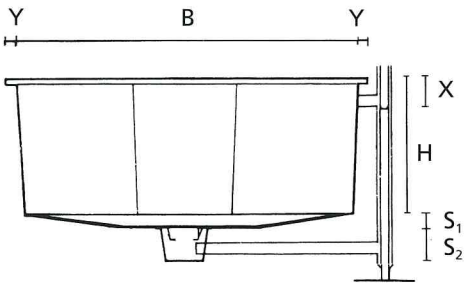

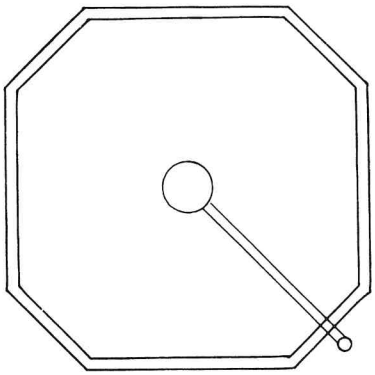

- The tanks contain glassfibre reinforced polyester.
- The tanks have a grey/green, smooth gel-coated interior surface which simplifies cleaning, and a light grey top-coated exterior surface.
- The tanks can be delivered with integrally cast feet, or can be installed in a sand bed.
- The tanks can be delivered with a flat sieve or a standing cylindrical sieve.
- The tanks can be delivered with either outside drainage/level control where the spillway enters the drain or a centre drain.
- We also offer other solutions upon request, e.g. double drainage for separating wastewater, a separate outlet for fish draining, etc.
- The tanks can be stacked for transportation.

B	H	X	S_1	S_2	Y	Tot. volume	Volume without spillway
600	600	–	–	–	50	0.2	–
2000	800	100	100	150	70	3.0	2.6
2000	1000	100	100	150	70	3.9	3.5
2000	1500	100	100	150	70	5.8	5.4
3000	800	150	100	150	90	6.8	5.6
3000	1250	150	100	150	90	10.7	9.3

B= diameter tank H= height of tank wall X= distance from top of tank to lower egde of spillway
S_1= slope, bottom of tank S_2= height «pot» Y= flange
All measurements inn mm. Volume in m^3

namdal plast as

N-7750 Namdalseid
Tel. +47 74 27 81 60 – Fax. +47 74 27 84 94
e-mail: namdap@online.no – www.namplast.com

High quality fish farming equipment