
Lindseth RRA 68

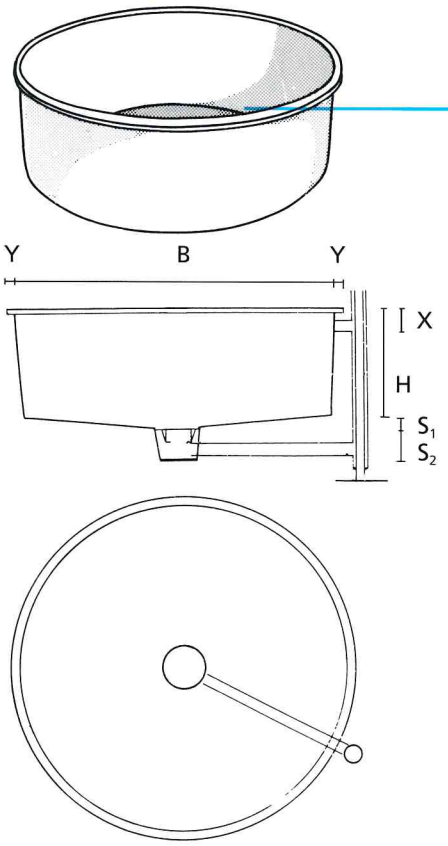

BROOD POOL

for fish farming

- The tanks consist of glassfibre reinforced polyester.
- The tanks have a grey/green, smooth gel-coated interior surface that simplifies cleaning, and a light grey top-coated exterior surface.
- The tanks can be delivered with exterior drainage/level control or centre drainage. Other solutions can be provided upon request, e.g. double drainage for separation of wastewater, separate outlet for fish draining etc.
- The tanks can be stacked for transportation. Pools with diameters of 2 and 3 metres are cast in one piece. Pools with diameters of 4, 5, 6, 8 and 11 metres consist of sections for assembly at the construction site. All necessary assembly materials is included.

B	H	X	S_1	S_2	Y	Tot. volume	Volume without spillway
800	600	150	80	160	50	0.3	3.3
1000	800	150	80	160	50	0.6	3.3
2000	1200	150	80	160	50	3.8	3.3
3000	1250	150	100	220	60	8.8	7.8
4000	1400	150	100	320	90	17.6	15.0
5000	1400	150	100	320	120	27.5	24.5
5000	1600	150	100	320	120	31.4	27.4
6000	1400	150	180	320	120	40.0	35.5
6000	2000	150	180	320	120	56.5	52.3
8000	1600	150	300	400	120	80.5	73.0
11000	2000/3500	–	400	500	120	–	–

B= diameter tank H= height of tank wall X= distance from top of tank to lower egde of spillway
S_1= slope, bottom of tank S_2= height «pot» Y= flange
All measurements inn mm. Volume in m^3

namdal plast as

N-7750 Namdalseid
Tel. +47 74 27 81 60 – Fax. +47 74 27 84 94
e-mail: namdap@online.no – www.namplast.com

High quality fish farming equipment